

**LBPPC-557615 /
557617 /
557619**

High Performance Panel PC

Features and Benefits:

- Support Intel® Core™ Duo / Core™ solo / Core™ 2 Duo / Celeron® M processor
- Supports Intel® 945GME + ICH7R Chipset
- On-board IDE interface, Type II Compact Flash slot
- Optional slim SATA CD-ROM drive
- Stainless steel front bezel




**ISO CERTIFIED
9001 14001**



LBPPC-557615 / LBPPC-557617 / LBPPC-557619


High Performance Panel PC

Front View

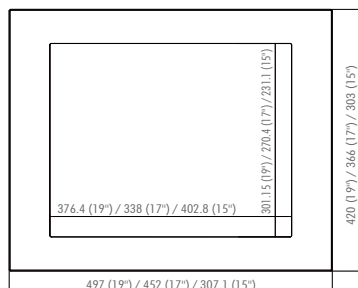


Rear View

LBPPC-557615



LBPPC-557617 / 557619

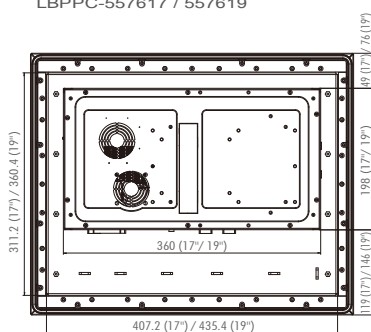


Side View

LBPPC-557615

557617

557619

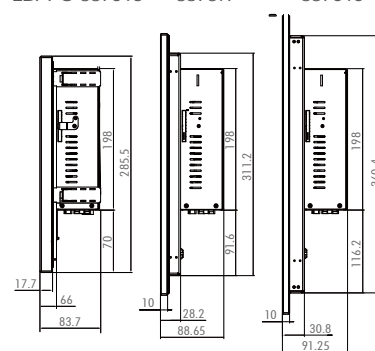

Unit: mm

Specification

Systems

CPU Support	Intel® Core™ Duo/ Core Solo / Core 2 Duo / Celeron M processor
Chipset	Intel® 945GME + ICH7R + FWH (FSB: 533/667MHz)
Memory Support	2 x 200-pin DDR2 SO-DIMM
Max. System Memory	4GB
Front Bezel	Stainless Steel
Open Frame	YES
Waterproof Level	IP65
Sound	AC' 97 Codec
Power Supply	AC ATX 180W power supply
Construction	Electro Galvanized Steel chassis
Wall Mount Type	VESA standard
Dimension (W x H x D)	15": 403 x 303 x 84mm 17": 452 x 366 x 89.3mm 19": 497 x 420 x 91.5mm
System Weight	15": 7.3 Kg / 17": 9.5Kg / 19": 11.5 Kg
Certificate	CE / FCC

I/O Ports

USB	4 x USB2.0
KB / Mouse	2 x PS/2 Port
Audio	1 x Line in, 1 x Line out, 1 x MIC in

Serial Port

4 x COM port (COM 1/3/4 for RS232, COM 2 for RS232 / 422 / 485, COM 3/4 support +5V, +12V Selectable)

LAN

1 x LAN (10/100/1000 Mbps)

VGA

1 x VGA

Drive Bays

2 x 2.5" SATA HDD, 1 x IDE CF slot on board, 1 x Slim CD-ROM

Expansion Slots

1 x PCIE slots, 1 x MiniPCI

Display

LCD	15" (XGA) / 17" (SXGA) / 19" (SXGA)
Touch Screen	5W Analog resistive (USB interface)
Max. Resolution	1024 x 768 (15") / 1280 x 1024 (17", 19")
Pixel Pitch	0.297 x 0.297 (15") / 0.264 x 0.264 (17") / 0.294 x 0.294 (19")
Brightness	350 cd/m ² (15") / 300 cd/m ² (17", 19")
Response Time (Tr + Td)	15": 16 ms / 17": 12 ms / 19": 20 ms

Environment

Operating Temp.	0° ~ 40°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%