
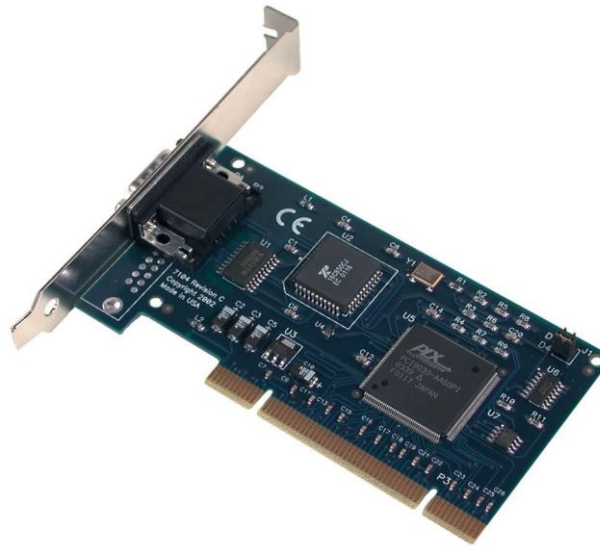


Low Profile PCI 1-Port RS-232 Serial Interface

Part: 7104 **Model:** COMM+850.LPCI

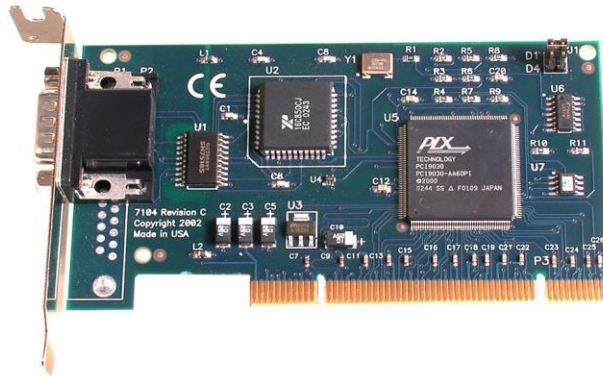

tienda.logicbus.com.mx
logicbus.com

ventas@logicbus.com
sales@logicbus.com

México
+52 (33)-3854-5975

USA
+1 (619) 619-7350

Description

The 7104 Low Profile PCI serial interface provides one RS-232 serial port capable of data rates to 460.8K bps. The board utilizes a 16C850 UART to provide 128-byte Tx/Rx FIFOs for maximum reliability in data-intensive applications.

The Sealevel SeaCOM software driver and utilities make installation and operation easy using Microsoft Windows or Linux operating systems.

The 7106e is a PCI Express X1 board compatible with any low profile PCI Express slot. If you have a standard size PCI Express slot, be sure to select the standard profile bracket.

The 7104 implements all modem control signals and is MD1 Low Profile and Universal Bus (3.3V and 5V) compatible. The 7104 is compatible with any low profile PCI slot. If you have a standard size PCI slot, be sure to select the standard profile bracket.

Category: One Port

Additional information

Communications Chip	16C850
Electrical Interface	RS-232
Humidity Range	10 – 90% Relative Humidity, Non-Condensing
Host Interface(s)	PCI
Max Data Distance	50 feet
Max Data Rate	460.8K bps
Operating Temperature	0°C to 70°C (32°F to 158°F)
PC Bracket	Low Profile
# of Ports	1
Serial Connector(s)	DB9M
Storage Temperature	-50°C to 105°C (-58°F to 221°F)
UART Series	850 UART

16C850 buffered UART with 128-byte FIFOs

Data rates to 460.8K bps

MD1 Low Profile and Universal Bus (3.3V and 5V) compatible

All modem control signals implemented

DB-9M connector

