


USB to 4 Optically Isolated Inputs / 4 Form C Relay Outputs Digital Interface Adapter

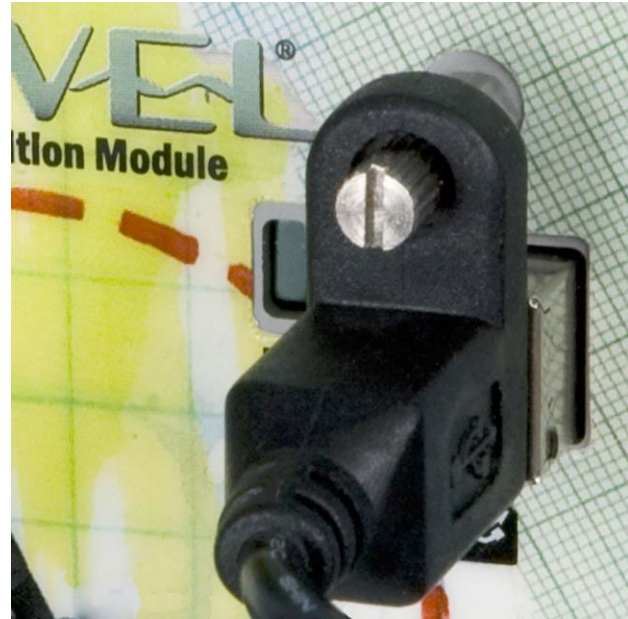

Part: 8112 **Model:** SeaDAC Lite PLC-8

tienda.logicbus.com.mx
logicbus.com

ventas@logicbus.com
sales@logicbus.com

México
+52 (33)-3854-5975

USA
+1 (619) 619-7350

Description

Control and monitor four optically isolated inputs and four Form C (SPDT) relay outputs via any USB connection with the 8112. Inputs can range from 5-30VDC and provide 3500VDC (2500VAC RMS) isolation to ground, while the high-current Form C relays can switch up to 6A loads at 250VAC and up to 5A at 60VDC. The Form C relays can be wired for either normally open or normally closed operation. Each Form C relay has a discrete common and each pair of inputs share a common. Status LEDs display I/O activity and field wiring is simplified via 3.5mm removable terminal blocks.

The SeaMAX software suite supports the SeaDAC Lite family and is designed to work with third party applications via the [SeaMAX API](#). Sealevel's [SeaMAX](#) software drivers and utilities make installation and operation easy using [Windows](#) and [Linux](#) operating systems.

The 8112 integrates Sealevel's [SeaLATCH locking USB](#) port, which is fully compatible with standard USB cables. When used with the included USB cable with a SeaLATCH USB type B connector, the metal thumbscrew provides a secure connection to the device and prevents accidental cable disconnection.

SeaDAC Lite modules are housed in a rugged, attractive plastic enclosure ideal for mounting on walls, under counters, or inside panels. The 8112 is USB bus powered, so no external power supply is needed. Standard operating temperature range of SeaDAC modules is 0C to +70C and extended temperature range (-40C to +85C) is optional.

Category: [SeaDAC Lite](#)

Additional information

Family	SeaDAC Lite
Input Isolation	2500VAC RMS, 3500VDC
Contact Current DC	30 VDC @ 700mA max., (100mA min.)
Contact Operate Time	10ms max.
Contact Release Time	5ms max.

Contact Voltage	60VDC max., 250VAC max., (5VDC min.)
Digital I/O	Form C Relay Outputs, Isolated Inputs
Dimensions	4.3 (L) x 3.4 (W) x 1.3 (H)
Extended Temperature	Call for Options
Humidity Range	10 – 90% Relative Humidity, Non-Condensing
Contact Current AC	6A max.
Input Impedance	6.2K Ohms (in series)
Input Range	5-30 VDC
Host Interface(s)	USB
Number of Inputs/Outputs	4 Inputs, 4 Outputs
Operating Temperature	0°C to 70°C (32°F to 158°F)
Output Power	DC 240W, AC 1200 VA
Output Type	SPDT Form C relays
# of Ports	4/4
Power Requirement	+5V @ 500mA
Storage Temperature	-50°C to 105°C (-58°F to 221°F)
USB Specification	1.1 Compliant, 2.0 Compatible

4 optically isolated inputs

Optical isolation provides protection against surges and ground loops

4 SPDT Form C relays

Field wiring is simplified via removable 3.5mm terminal blocks compatible with 16-30 AWG wire

Optional removable spring-clamp terminal blocks available

Status LEDs display I/O activity and USB connection

Sealevel's SeaLATCH locking USB port provides secure connection with SeaLATCH USB cables via metal thumbscrews

Powered by USB connection

Sealevel software supports Windows 7/Vista/XP/2000 operating systems

Housed in rugged, attractive plastic enclosure

Includes 6' USB type A to SeaLATCH USB type B device cable (Item# CA356)

Copyright 1996 - 2021 - Sealevel Systems, Inc. All rights reserved.