


# USB to 4 Reed Relay Outputs Digital Interface Adapter

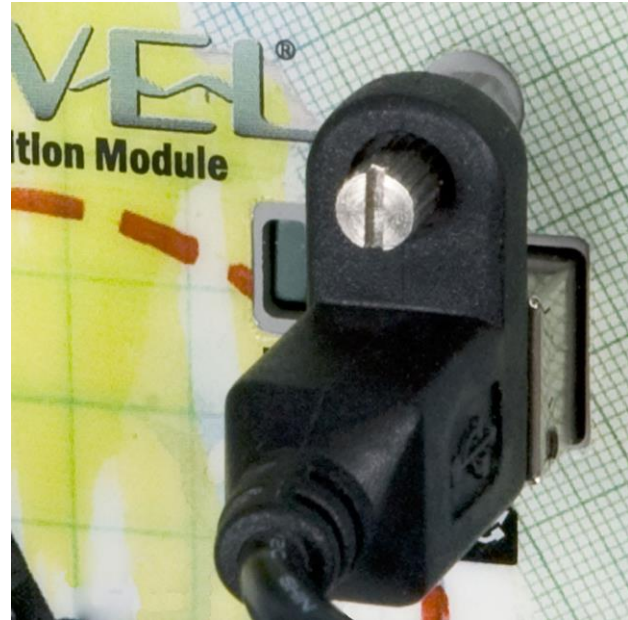

**Part:** 8114 **Model:** SeaDAC Lite REL-4

tienda.logicbus.com.mx  
logicbus.com

ventas@logicbus.com  
sales@logicbus.com

México  
+52 (33)-3854-5975

USA  
+1 (619) 619-7350

## Description

---

Control and monitor four dry-contact Reed relay outputs via any USB connection with the 8114. The Reed relays provide long-life switch closures well suited to low current devices. Each Reed relay has a discrete common. Status LEDs display I/O activity and field wiring is simplified via 3.5mm removable terminal blocks.

The SeaMAX software suite supports the SeaDAC Lite family and is designed to work with third party applications via the [SeaMAX API](#). Sealevel's [SeaMAX](#) software drivers and utilities make installation and operation easy using [Windows](#) and [Linux](#) operating systems.

The 8114 integrates Sealevel's [SeaLATCH locking USB](#) port, which is fully compatible with standard USB cables. When used with the included USB cable with a SeaLATCH USB type B connector, the metal thumbscrew provides a secure connection to the device and prevents accidental cable disconnection.

SeaDAC Lite modules are housed in a rugged, attractive plastic enclosure ideal for mounting on walls, under counters, or inside panels. The 8114 is USB bus powered, so no external power supply is needed. Standard operating temperature range of SeaDAC modules is 0C to +70C and extended temperature range (-40C to +85C) is optional.

Category: [SeaDAC Lite](#)

## Additional information

---

<b>Family</b>	SeaDAC Lite
<b>Contact Bounce Time</b>	0.5ms max.
<b>Contact Current</b>	500mA max.
<b>Contact Operate Time</b>	0.5ms max.
<b>Contact Release Time</b>	0.2ms max.
<b>Contact Voltage</b>	60VDC max.
<b>Digital I/O</b>	Reed Relay Outputs
<b>Dimensions</b>	4.3 (L) x 3.4 (W) x 1.3 (H)

---

<b>Extended Temperature</b>	Call for Options
<b>Humidity Range</b>	10 – 90% Relative Humidity, Non-Condensing
<b>Host Interface(s)</b>	USB
<b>Number of Inputs/Outputs</b>	4 outputs
<b>Operating Temperature</b>	0°C to 70°C (32°F to 158°F)
<b>Output Power</b>	DC 30W, AC 10VA max.
<b>Output Type</b>	SPST Form A Reed relays
<b># of Ports</b>	4
<b>Power Requirement</b>	+5V @ 500mA
<b>Storage Temperature</b>	-50°C to 105°C (-58°F to 221°F)
<b>USB Specification</b>	1.1 Compliant, 2.0 Compatible

4 SPST Reed relays

Field wiring is simplified via removable 3.5mm terminal blocks compatible with 16-30 AWG wire

Optional removable spring-clamp terminal blocks available

Status LEDs display serial transmit and receive activity

Sealevel's SeaLATCH locking USB port provides secure connection with SeaLATCH

USB cables via metal thumbscrews

Powered by USB connection

Sealevel software supports Windows 7/Vista/XP/2000 operating systems

Housed in rugged, attractive plastic enclosure

Includes 6' USB type A to SeaLATCH USB type B device cable (Item# CA356)

Copyright 1996 - 2021 - Sealevel Systems, Inc. All rights reserved.